

CAN-PASS LP

Unique design features



Committed to excellence in developing Arterial Therapeutic Systems

CAN-PASS LP



Excellent pushability

With a specific treatment of the hypotube

Highest crossability

Flexible tapered tip
Lowest lesion entry profile (0,016 ")

Optimal trackability

Innovative hydrophilic coating

Length	Diameter in mm											
	1.50	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.50	5.00
8 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
10 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
15 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
18 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
20 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
25 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
30 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
40 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

✓ Available

Pressure in ATM	Diameter in mm											
	1.50	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.50	5.00
2	1,39	1,85	2,09	2,32	2,55	2,78	3,01	3,24	3,48	3,71	4,17	4,63
4	1,44	1,92	2,16	2,40	2,64	2,88	3,12	3,36	3,60	3,84	4,32	4,80
6	1,50	2,00	2,25	2,50	2,75	3,00	3,25	3,50	3,75	4,00	4,50	5,00
8	1,54	2,05	2,31	2,56	2,82	3,07	3,33	3,58	3,84	4,09	4,60	5,12
10	1,57	2,09	2,35	2,61	2,87	3,13	3,39	3,65	3,91	4,17	4,69	5,22
12	1,59	2,12	2,39	2,65	2,92	3,18	3,45	3,71	3,98	4,24	4,77	5,30
14	1,62	2,16	2,43	2,70	2,97	3,24	3,51	3,78	4,05	4,32	4,86	5,40
16	1,65	2,20	2,48	2,75	3,03	3,30	3,58	3,85	4,13	4,40	4,95	5,50
18	1,68	2,24	2,52	2,80	3,08	3,36	3,64	3,92	4,20	4,48	5,04	5,60

■ Nominal Pressure (NP)


■ Rated Burst Pressure (RBP)

Balloon size measured at 37°C

Catheter length: **140 cm**

Rapid exchange length: **25 cm**

Markers on the proximal shaft: **90 cm and 100 cm**

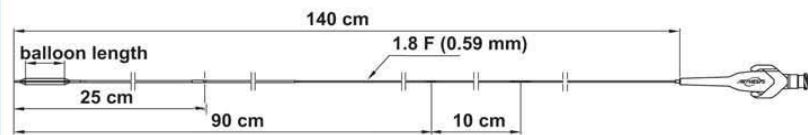

www.lamire.com

DVEG-001/02-2006/SDD



Integrated markers for optimal low-profile

AAA INTL Ltd

33 Bridge Street, Hereford, HR4 9DQ UK

Tel +44 1926 800153

E-mail : info@aaa-intl.com

Web-site : http://www.aaa-intl.com

